EC11 11mm Size Metal Shaft Type

Compact and highly reliable type available in many varieties

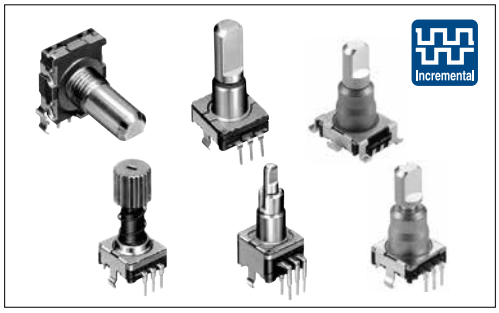

Typical Specifications

Items	Specifications
Output signal	Two phase of A, B Self-return switch (EC111 / EC11E0B)
Rating	10mA 5V DC
Operating life	15,000 cycles 100,000 cycles (EC11K / EC11J)
Operating temperature range	−40℃ to +85℃

Product Line

Structure	Shaft configuration	Length of the shaft (mm)	Torque (mN·m)	Number of detent	Number of pulse	Push-on switch	Travel of push-on switch (mm)	Operating life (cycles)	Minimum order unit (pcs.) Japan	Minimum order unit (pcs.) Export	Product No.	Drawing No.
Horizontal	Flat	20	12±7	30	15	Without	—	15,000	700	1,400	**EC11B15202AN**	1
						With	0.5				**EC11B15242AZ**	2
							1.5				**EC11B15242B1**	3
Vertical			10±7	18	9	Without	—		1,200	2,400	**EC11E09204A4**	4
				30	15						**EC11E15204A3**	
				36	18						**EC11E1820402**	
				18	9	With	0.5				**EC11E09244BS**	5
				30	15						**EC11E15244G1**	
			7^{+3}_{-4}	Without							**EC11E153440D**	
			10±7	36	18						**EC11E18244AU**	
			7^{+3}_{-4}	Without							**EC11E183440C**	
			10±7	18	9		1.5				**EC11E09244AQ**	
				30	15						**EC11E15244B2**	
			7^{+3}_{-4}	Without							**EC11E1534408**	
			10±7	36	18						**EC11E18244A5**	
			7^{+3}_{-4}	Without							**EC11E1834403**	
		15	10±7	30	15	Without	—				**EC11N1520401**	6
						With	0.5				**EC11N1524402**	7
							1.5				**EC11N1525404**	
		20				Without	—				**EC11N1520402**	6
						With	0.5				**EC11N1524403**	7
							1.5				**EC11N1525405**	
Less shaft wobble	Serrated	25	12±7			Without	—		1,000	2,000	**EC11G1560414**	8
			8.5±5	Without		With	1.5				**EC11G1574402**	9
			12±7	30							**EC11G1564411**	10
											EC11M1565403	9
			8.5±5	Without							**EC11M1575403**	10
Vertical	Flat	20	12±5	18	9	Without	—	100,000			**EC11K0920404**	11
				30	15						**EC11K1520406**	
				18	9	With	0.5				**EC11K0924404**	12
				30	15						**EC11K1524406**	
				18	9		1.5				**EC11K0925416**	
				30	15						**EC11K1525413**	

Note

Other varieties are also available. Please inquire.

Refer to P.267 for attached parts.
Refer to P.268 for product varieties.
Refer to P.270 for switch specifications.
Refer to P.299 for soldering conditions.

Product Line

Structure	Shaft configuration	Length of the shaft (mm)	Torque (mN·m)	Number of detent	Number of pulse	Push-on switch	Travel of push-on switch (mm)	Operating life (cycles)	Minimum order unit (pcs.) Japan	Minimum order unit (pcs.) Export	Product No.	Drawing No.
Reflow	Flat	20	12±5 (Initial) 10±4 (After reflow)	18	9	Without	—	100,000	600	600	**EC11J0920404**	13
				30	15						**EC11J152040F**	
				18	9	With	0.5				**EC11J0924411**	14
				30	15						**EC11J1524413**	
				18	9		1.5				**EC11J0925403**	
				30	15						**EC11J1525402**	
Push lock	20-tooth Serrated	25	10±7			Without	—	15,000	800	1,600	**EC11E152T409**	15
		26.4				With	8				**EC11E152U402**	16
Self-return switch	Flat	15	3 to 30	Without	Self-return switch	Without	—		1,200	2,400	**EC1110120005**	17
		20				With	0.5				**EC111012010H**	18
							1.5				**EC1110120201**	
Dual-shaft	Flat	Inner-shaft=25	10±7	30	15		0.5	15,000	700	1,400	**EC11EBB24C03**	19
	Slotted	Outer-shaft=15				Without	—					
	Flat	Inner-shaft=25				With	1.5				**EC11E0B2LB01**	20
	Slotted	Outer-shaft=15	3 to 30	Without	Self-return switch	Without	—					

Note

Other varieties are also available. Please inquire.

Packing Specifications

Tray

Product No.	Number of packages (pcs.) 1 case /Japan	Number of packages (pcs.) 1 case /export packing	Export package measurements (mm)
EC11B	700	1,400	524×374×201
EC11E09/15/18/EC11N	1,200	2,400	540×360×250
EC11G/EC11K/EC11M	1,000	2,000	
EC11J	600	600	369×283×263
EC11E152T/U	800	1,600	507×363×230
EC111	1,200	2,400	507×363×216
EC11E0B/BB	700	1,400	

Refer to P.267 for attached parts.
Refer to P.268 for product varieties.
Refer to P.270 for switch specifications.
Refer to P.299 for soldering conditions.

Dimensions

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)
1	**EC11B** **Horizontal**	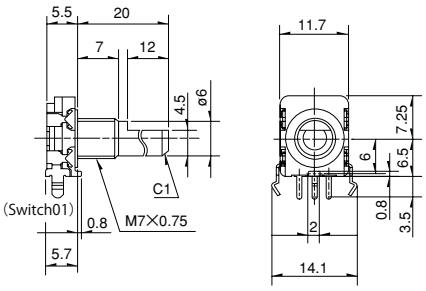	
2	**EC11B** **Horizontal** **with push-on switch** **(travel 0.5mm)**	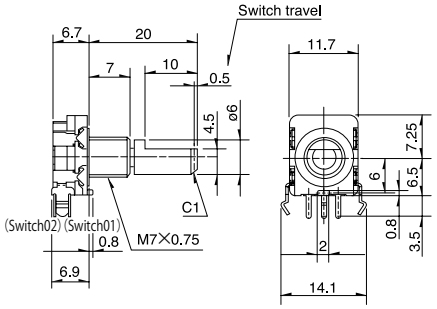	
3	**EC11B** **Horizontal** **with push-on switch** **(travel 1.5mm)**	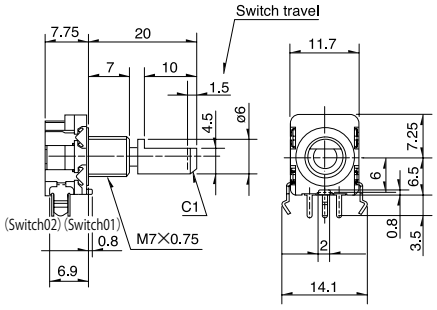	
4	**EC11E** **Vertical**	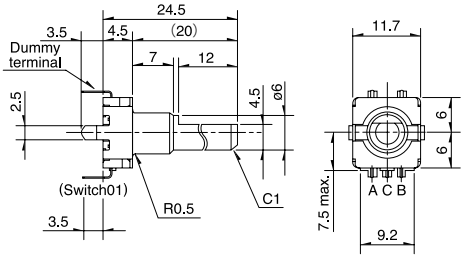	
5	**EC11E** **Vertical** **with push-on switch** **(travel 0.5mm / 1.5mm)**	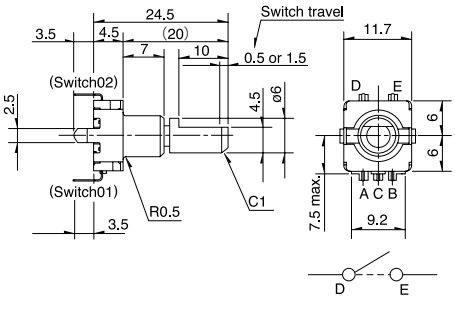	

Dimensions

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)
6	**EC11N Vertical**	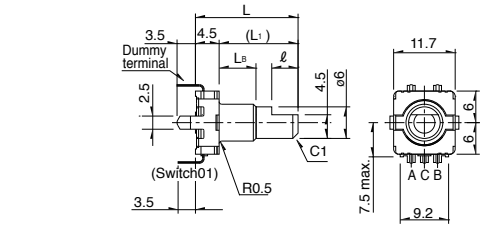	
7	**EC11N Vertical with push-on switch (travel 0.5mm / 1.5mm)**	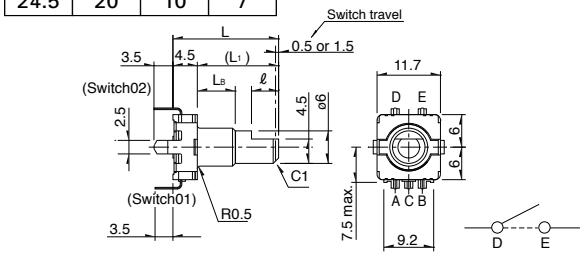	
8	**EC11G Vertical**		
9	**EC11G, EC11M Vertical with push-on switch (travel 1.5mm)**  EC11G EC11M	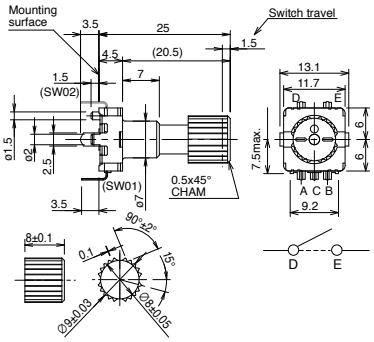	
10	**EC11G, EC11M Vertical with push-on switch (travel 1.5mm)**  EC11G EC11M	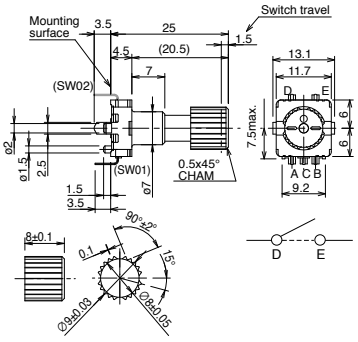	

Dimensions

Unit:mm

No.	Photo	形状	PC board mounting hole dimensions (Viewed from mounting side)
11	**EC11K** **Vertical**	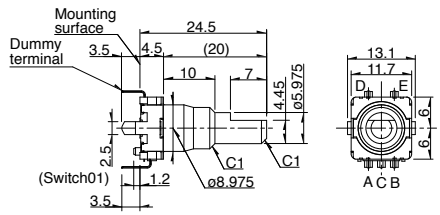	 Black part : Do not solder and no wiring for electrical contact.
12	**EC11K** **Vertical** **with push-on switch** **(travel 0.5mm / 1.5mm)**		 Black part : Do not solder and no wiring for electrical contact.
13	**EC11J** **Reflow**		 A slant line part:The solder land Black part: Do not solder and wiring for electrical contact
14	**EC11J** **Reflow** **with push-on switch** **(travel 0.5mm / 1.5mm)**		 A slant line part:The solder land Black part: Do not solder and wiring for electrical contact
15	**EC11E152T** **Push-lock mechanism** **with push-lock switch**		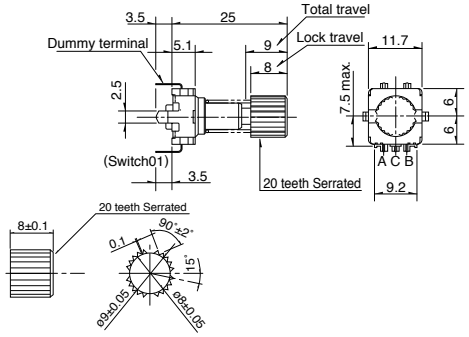 

Dimensions

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)
16	**EC11E152U** **Push-lock mechanism with push-lock switch** 	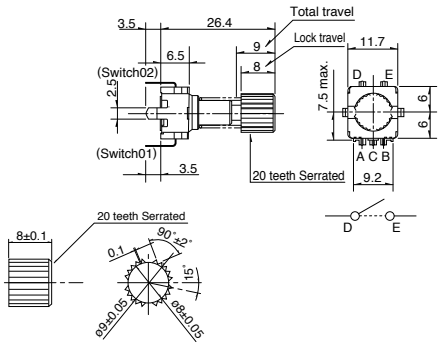	
17	**EC111** **Self-return switch** 	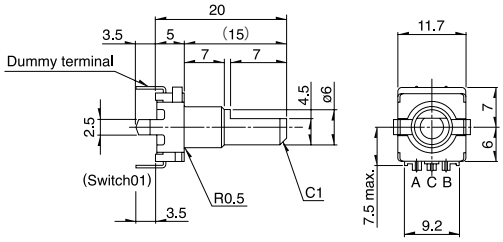	
18	**EC111** **Self-return switch with push-on switch (travel 0.5mm / 1.5mm)** 	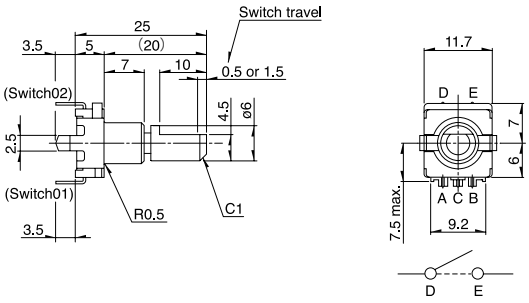	
19	**EC11E** **Dual-shaft type with push-on switch (travel 0.5mm)** **Inner shaft: encoder** **Outer shaft: encoder** 	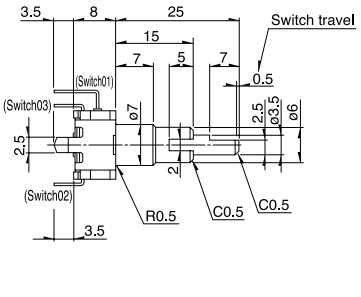	
20	**EC11E** **Dual-shaft type with push-on switch (travel 1.5mm)** **Inner shaft: encoder** **Outer shaft: self-return switch** 	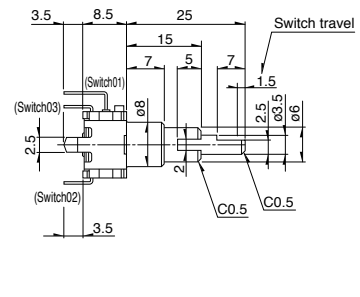	

Output Wave

EC11B / EC11E / EC11G / EC11N / EC11M	EC11E / EC11J / EC11K
	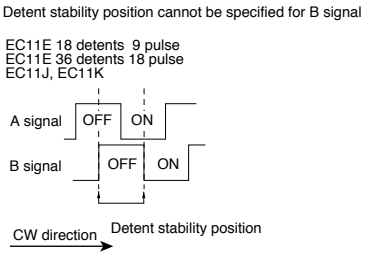

Sliding Noise

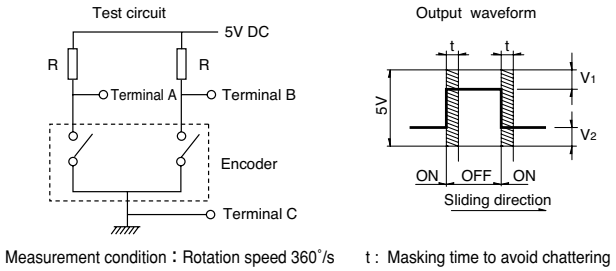

Measurement condition：Rotation speed 360˚/s　　t : Masking time to avoid chattering

EC11B	$V_1=V_2$=1.5V max. At R = 5kΩ Chattering : 2ms max. Bounce : 2ms max.
EC11E/EC11G/ EC11N/EC11M	$V_1=V_2$=1.5V max. At R = 5kΩ Chattering : 3ms max. Bounce : 2ms max.
EC11J / EC11K	$V_1=V_2$=2.5V max. At R = 5kΩ Chattering : 3ms max. Bounce : 2ms max.

Circuit Diagram

EC111/EC11E0B



11mm Size Metal Shaft Type / Attached Parts

The following parts are included with the product.

EC11B Series

Unit:mm

Nut	Washer
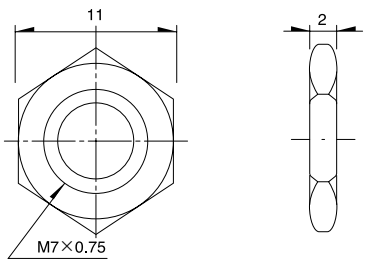	

Shaft Dimensions

1. Single-shaft Type

1) Serrated Type

Unit:mm

EC11
Style (Shaft diameter: φ6)
Not applicable for EC11E and EC11G with push-lock mechanism



※M7 for EC11B.

● Detailed dimensions

	L_1	L_B	ℓ_1	ℓ_2	S_1
※	20	7	6	1	7
	25	10	10	2	11

※L_B=7 for EC11B.

EC11K / EC11J
Style (Shaft diameter: φ6)



● Detailed dimensions

L_1	L_B	ℓ_1
15	7	5
20	10	6

EC11G
Style (Shaft diameter: φ9)

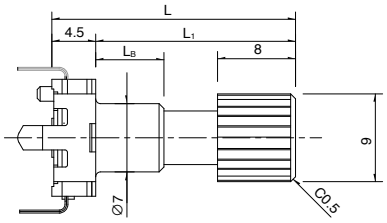

● Detailed dimensions

L	L_1	L_B
18	13.5	5
25	20.5	7
28	23.5	10

2) Flat Type

Unit:mm

EC11
Style (Shaft diameter: φ6)



※M7 for EC11B.

● Detailed dimensions

	L_1	L_B	ℓ
※1	15	5	7
	15	7	5 (6)
	20	7	10 (12)
※2	25	10	12

※1 Does not comply with EC111
※2 L_B=7 for EC11B.
Values in parentheses apply to products without push-on switch.

EC11K / EC11J
Style (Shaft diameter: φ5.975)



● Detailed dimensions

L_1	L_B	ℓ
15	7	5
20	10	7

Notes

1. The highlighted figures in shaft types refer to Product Specifications in P.261 and P.262.
2. Other varieties are also available. Please inquire.

Shaft Dimensions

1. Single-shaft Type

3) Slotted Type

Unit:mm

EC11
Style (Shaft diameter: φ6)



※M7 for EC11B.

● Detailed dimensions

	L_1	L_B
	15	7
	20	7
※	25	10

※L_B=7 for EC11B

EC11K / EC11J
Style (Shaft diameter: φ5.975)



● Detailed dimensions

L_1	L_B
15	7
20	10

2. Standard Dimensions and Configuration of Dual-shaft Type

Flat Type

Unit:mm

EC11E
Style (Inner-shaft : φ3.5 Outer-shaft : φ6)



● Detailed dimensions

L_1	L_2	L_B	ℓ_1	ℓ_2
20	10	5	7	4
25	15	7	7	5
30	20	10	7	5

※⌀7 for type with inner / outer shaft encoders (EC11EBB)

Notes

1. The highlighted figures in shaft types refer to Product Specifications in P.261 and P.262.
2. Other varieties are also available. Please inquire.

11mm Size Metal Shaft Type / Switch Specifications

1. EC11B Series

Switch type		Momentary push switch	
Contact arrangement		Single pole and single throw (Push-on)	
Travel (mm)		$0.5^{+0.4}_{-0.3}$	1.5±0.5
Operating force		6±3N	5±2N
Operating life		25,000 times	20,000 times
Electrical performance	Rating	0.1A 5V DC (500μA 5V DC min. ratings)	
	Contact resistance	100mΩ max. for initial period, 200mΩ max. after operating life.	
	Insulation resistance	100MΩ min. 250V DC	
	Voltage proof	300V AC for 1 minute or 360V AC for 2 second	

2. EC11E/EC11N/EC111 Series

Switch type		Momentary push switch	
Contact arrangement		Single pole and single throw (Push-on)	
Travel (mm)		0.5±0.3	1.5±0.5
Operating force		$6^{+2.5}_{-2}$N	4±2N
Operating life		20,000 times	
Electrical performance	Rating	0.1A 5V DC (500μA 5V DC min. ratings)	
	Contact resistance	100mΩ max. for initial period, 200mΩ max. after operating life.	
	Insulation resistance	100MΩ min. 250V DC	
	Voltage proof	300V AC for 1 minute or 360V AC for 2 second	

3. EC11G/EC11M Series

Switch type		Momentary push switch
Contact arrangement		Single pole and single throw (Push-on)
Travel (mm)		1.5±0.35
Operating force		5±2N
Operating life		20,000 times
Electrical performance	Rating	0.15A 5V DC (500μA 5V DC min. ratings)
	Contact resistance	100mΩ max. for initial period, 200mΩ max. after operating life.
	Insulation resistance	100MΩ min. 250V DC
	Voltage proof	300V AC for 1 minute or 360V AC for 2 second

4. EC11K/EC11J Series

Switch type		Momentary push switch	
Contact arrangement		Single pole and single throw (Push-on)	
Travel (mm)		0.5±0.3	1.5±0.5
Operating force		5±2N	4±2N
Operating life		1,000,000 times	100,000 times
Electrical performance	Rating	0.1A 5V DC (0.1mA 5V DC min. ratings)	
	Contact resistance	100mΩ max. for initial period, 200mΩ max. after operating life.	
	Insulation resistance	100MΩ min. 250V DC	
	Voltage proof	300V AC for 1 minute or 360V AC for 1 second	

5. EC11E152U Series

Switch type		Push lock mechanism switch
Contact arrangement		Single pole and single throw (Push-on)
Travel (mm)		8±0.8
Operating force		8N max.
Operating life		10,000 times
Electrical performance	Rating	0.1A 5V DC (500μA 5V DC min. ratings)
	Contact resistance	100mΩ max. for initial period, 200mΩ max. after operating life.
	Insulation resistance	100MΩ min. 250V DC
	Voltage proof	300V AC for 1 minute or 360V AC for 2 second

List of Varieties

Type			Metal shaft									
			9mm size	11mm size								
Series			**EC09E**	**EC11B**	**EC11E**							**EC11N**
Photo												
Output			Incremental (Two phase A and B)									
Shaft types			Single-shaft							Dual-shaft		Single-shaft
Operating direction			Vertical	Horizontal	Vertical							
Number of pulse / Number of detent			15/30		9/18 15/30 or without 18/36 or without							15/30
Features			—	—	Without detent Push-lock mechanism					—		—
Dimensions (mm)		W	9.5	11.7								
		D		13.75	12							
		H	4.5	5.5/6.7/7.75	4.5					8/8.5		4.5
Operating temperature range			−40℃ to +85℃									
Operating life			15,000 cycles									
Automotive use			●	●	●							●
Life cycle (availability)			★2	★2	★2							★2
Electrical performance	Rating		10mA 5V DC									
	Max./min. operating current (Resistive load)		10mA /1mA									
	Insulation resistance		100MΩ min. 250V DC									
	Voltage proof		300V AC for 1 minute or 360V AC for 1s	300V AC for 1 minute or 360V AC for 2s								
Mechanical performance	Rotational torque (Without detent)		—	—	7^{+3}_{-4}mN·m					—		—
	Detent torque		8±5mN·m	12±7mN·m	10±7mN·m							
	Push-pull strength		100N									
Shaft configuration			Flat	Flat, Slotted, Serrated						Inner-shaft : Flat Outer-shaft : Slotted		Flat
Terminal type			Insertion									
Switch Specifications	Switch type		Push-on switch						Push-lock mechanism switch ※	Push-on switch		
	Contact arrangement		Single pole and single throw (Push-on)									
	Travel (mm)		0.5±0.3	1.5±0.5	$0.5^{+0.4}_{-0.3}$	1.5±0.5	0.5±0.3	1.5±0.5	8±0.8	0.5±0.3	1.5±0.5	0.5±0.3	1.5±0.5
	Operating force (N)		$6^{+2.5}_{-2}$	4±2	6±3	5±2	$6^{+2.5}_{-2}$	4±2	8 max.	$6^{+2.5}_{-2}$	4±2	$6^{+2.5}_{-2}$	4±2
	Rating		10mA 5V DC (1mA 5V DC min. ratings)	0.1A 5V DC (500μA 5V DC min. ratings)									
	Contact resistance		100mΩ max. for initial period; 200mΩ max. after operating life.									
	Operating life		10,000 times	25,000 times	20,000 times				10,000 times	20,000 times		
Page			259	261								

Encoders Soldering Conditions · · · · · 299
Encoders Cautions · · · · · 300

Notes

1. ※marked specification is only applicable to EC11E152U402.
2. ●Indicates applicability to all products in the series.

Type		Metal shaft 11mm size					
Series		**EC11G**	**EC11M**	**EC111**	**EC11K**	**EC11J**	**EM11B**
Photo							
Output		Incremental (Two phase A and B)		Self-return switch	Incremental (Two phase A and B)		
Shaft types		Single-shaft					
Operating direction		Vertical					
Number of pulse / Number of detent		15/30 15/without		—	9/18 15/30		16/16
Features		Less shaft wobble		—	—	Surface Mount type	Magnetic type
Dimensions (mm)	W	11.7					10.8
	D	12		13	12	15.3	11
	H	4.5		5	4.5		7.5
Operating temperature range		−40℃ to +85℃					−30℃ to +85℃
Operating life		15,000 cycles			100,000 cycles		1,000,000 cycles
Automotive use		●	●	●	●	●	●
Life cycle (availability)							
Electrical performance	Rating	10mA 5V DC					10mA 5V±5% DC
	Max./min. operating current (Resistive load)	10mA / 1mA					15mA / —
	Insulation resistance	100MΩ min. 250V DC					100MΩ min.100V DC
	Voltage proof	300V AC for 1 minute or 360V AC for 2s			300V AC for 1 minute or 360V AC for 1s		250V AC for 1 minute or 300V AC for 2s
Mechanical performance	Rotational torque (Without detent)	8.5±5mN·m		3 to 30mN·m	—	—	—
	Detent torque	12±7mN·m		—	12±5mN·m	12±5mN·m (Initial) 10±4mN·m (After reflow)	10±5mN·m
	Push-pull strength	100N					
Shaft configuration		Serrated		Flat, Slotted, Serrated			Flat
Terminal type		Insertion				Reflow	Insertion
Switch Specifications	Switch type	Push-on switch					
	Contact arrangement	Single pole and single throw (Push-on)					
	Travel (mm)	1.5±0.35		0.5±0.3 / 1.5±0.5	0.5±0.3 / 1.5±0.5	0.5±0.3 / 1.5±0.5	$0.5^{+0.3}_{-0.2}$
	Operating force (N)	5±2		$6^{+2.5}_{-2}$ / 4±2	5±2 / 4±2	5±2 / 4±2	5.5±3
	Rating	0.1A 5V DC (500µA 5V DC min. ratings)			0.1A 5V DC (0.1mA 5V DC min. ratings)		5mA 5V DC (50mA 12V DC max. ratings)
	Contact resistance	100mΩ max. for initial period, 200mΩ max. after operating life.					500mΩ max. for initial period, 5mΩ max. after operating life.
	Operating life	20,000 times			1,000,000 times / 100,000 times	1,000,000 times / 100,000 times	1,000,000 times
Page		261					271

Encoders Soldering Conditions · 299
Encoders Cautions · 300

Note

● Indicates applicability to all products in the series.

Reference for Manual Soldering

Series	Tip temperature	Soldering time	No. of solders
EC05E, EC09E, EC10E, EC111, EC11B, EC11E, EC11G, EC11K, EC11M, EC11N, EC12D, EC12E, EC18A, EC21A, EC28A, EC35A, EC35AH, EC40A, EC45A, EC50A, EC60B, EM11B, EC21C, EC28C, EC35CH	350℃ max.	3s max.	1 time
EC11J	350±10℃	3^{+1}_{0}s	2 times

Reference for Dip Soldering

Series	Preheating		Dip soldering		No. of solders
	Soldering surfacetemperature	Heating time	Soldering temperature	Soldering time	
EC09E, EC11B, EC111, EC11E, EC11G, EC11K, EC11M, EC11N, EC18A, EC21A, EC28A, EC35A, EC35AH, EC50A, EC60B	100℃ max.	2 min. max.	260±5℃	5±1s	2 times max.
EM11B	100℃ max.	1 min. max.	260℃ max.	3s max.	2 times max.
EC10E, EC12D, EC12E	100℃ max.	1 min. max.	260±5℃	3±1s	2 times max.
EC40A	110℃ max.	1 min. max.	260℃ max.	10s max.	1 time
EC45A	100℃ max.	2 min. max.	260℃ max.	5s max.	2 times max.

Example of Reflow Soldering Condition

Temperature profile

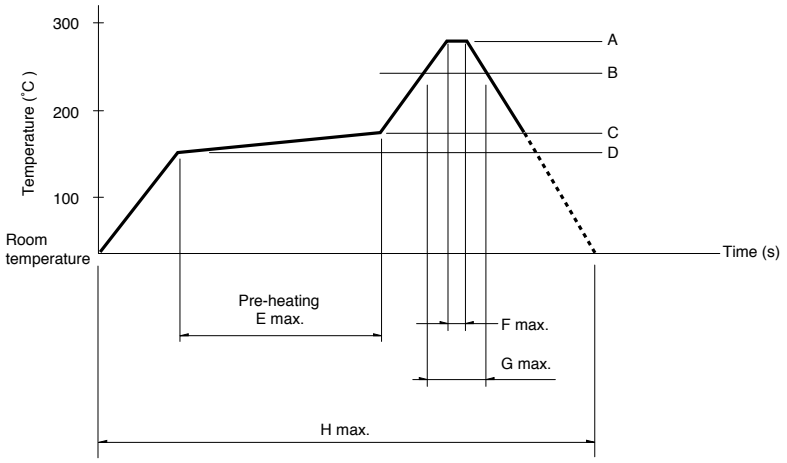

Series	A	B	C	D	E	F	G	H	No. of reflows
EC11J	260℃	230℃	180℃	150℃	2 min. max.	3s	40s	4 min. max.	2 times max.
EC05E	250℃ min.	230℃ min.	180℃	150℃	60s to 120s	—	30s to 40s	—	2 times max.
EC21C	230℃ to 245℃	220℃	200℃	150℃	60s to 120s	—	25s to 60s	300s max.	1 time max.
EC28C, EC35CH	260℃	230℃	180℃	150℃	2 min. min.	3s	40s	230s max.	1 time max.

Notes

1. When using an infrared reflow oven, solder may sometimes not be applied. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
2. The temperatures given above are the maximum temperatures at the terminals of the encoder when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the encoder may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the encoder does not rise to 250℃ or greater.
3. Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ALPS:

EC11E1834403 EC11E15204A3 EC11E152U402 EC11J1524413 EC11E09244AQ EC11E153440D EC11J0925403 EC11E1534408 EC11E183440C EC11E1820402 EC11E09204A4 EC11E09244BS EC11E0B2LB01 EC11E15244G1 EC11J0924411 EC11E18244A5 EC11EBB24C03 EC11E18244AU EC11E15244B2 EC11J1525402 EC11E152T409 EC11G1564411 EC11J0920404 EC11G1560414 EC11G1574402 EC11J152040F EC11K0924404 EC11K1520406 EC11K1524406 EC11B15242AZ EC11K1525413 EC11B15242B1